

HFUG-2020AN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

The HFUG-2020AN module is Toray's latest UF innovation that features hollow fibers with a smaller diameter but with improved membrane durability and performance. The result is an increased surface area per module for more production output.

Membrane Characteristics		Unit	Value
Membrane Material			PVDF (Polyvinylidene fluoride)
Nominal Pore Size		μm	0.01
Outer Membrane Surface Area (module)		m ² (ft ²)	90 (969)
Operating Parameters		Unit	Value
Maximum Feed water / Filtrate Flow		m ³ /h (gpm)	15 (66)
Maximum Backwash Flow		m ³ /h (gpm)	16.8 (74)
Maximum Air Flow		Nm ³ /h (scfm)	9.0 (5.3)
Maximum Inlet Pressure		kPa (psi)	300 (43.5)
Maximum Backwash Pressure		kPa (psi)	300 (43.5)
Normal Operating Trans-membrane Pressure		kPa (psi)	0–200 (0–29)
Operating Temperature Range		°C (°F)	0–40 (32–104)
pH Range	During Filtration		1–10
	During Cleaning		0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.



Product Certifications & Compliances

- NSF/ANSI 61 for drinking water applications
- NSF/ANSI 419 to comply with the U.S. EPA's Long Term 2 Enhanced Surface Water Treatment Rule (LT2ESWTR), which allows membrane manufacturers to prove Cryptosporidium reduction.
- Association of Membrane Separation Technology of Japan



Applications

Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Secondary and Tertiary wastewater

■ Product Datasheet

HFUG-2020AN


Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	216 (8.5)
Length		mm (ft)	2,160 (7.087)
Weight	Full of Water	kg (lbs)	92 (203)
	After Draining	kg (lbs)	59 (131)

Connections	Value
(A) Filtrate Outlet	80A
(B) Air Outlet	65A
(C) Feed Water / Air Inlet	80A

Material Specifications	
Description	Material
Casing	uPVC
Cap	uPVC
Potting	Epoxy resin
O-ring	EPDM

Please contact Toray for more detailed drawing and dimensions.

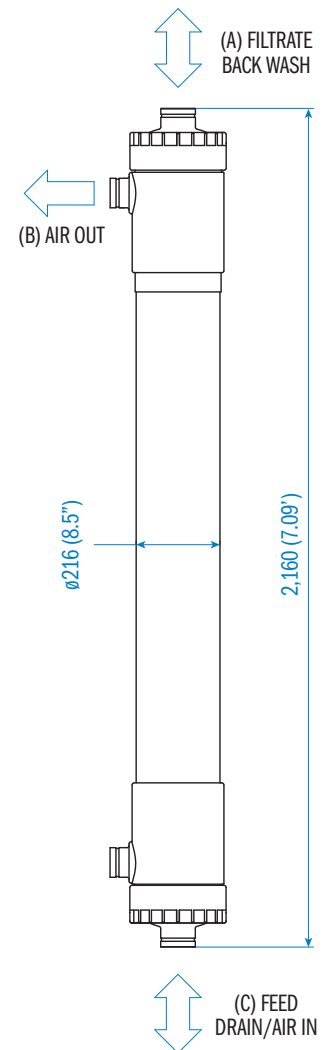

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

LinkedIn YouTube

For more info, please visit
water.toray

HFU-2020AN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Toray's PVDF membrane construction is highly resistant to chlorine and strong acids, which allows for better cleaning and optimization of filtration flux rates after cleaning. The hollow fiber modules effectively remove suspended solids, viruses, and bacteria and are certified for drinking water applications.

Membrane Characteristics		Unit	Value
Membrane Material			PVDF (Polyvinylidene fluoride)
Nominal Pore Size		μm	0.01
Outer Membrane Surface Area		m ² (ft ²)	72 (775)
Operating Parameters		Unit	Value
Maximum Feed water / Filtrate Flow		m ³ /h (gpm)	12 (53)
Maximum Backwash Flow		m ³ /h (gpm)	13.5 (59)
Maximum Air Flow		Nm ³ /h (scfm)	9.0 (5.3)
Maximum Inlet Pressure		kPa (psi)	300 (43.5)
Maximum Backwash Pressure		kPa (psi)	300 (43.5)
Normal Operating Transmembrane Pressure		kPa (psi)	0–200 (0–29)
Operating Temperature Range		°C (°F)	0–40 (32–104)
pH Range	During Filtration		1–10
	During Cleaning		0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.



Product Certifications and Compliances

- NSF/ANSI 61 for drinking water applications
- NSF/ANSI 419 to comply with the U.S. EPA's Long Term 2 Enhanced Surface Water Treatment Rule (LT2ESWTR), which allows membrane manufacturers to prove Cryptosporidium reduction.
- Association of Membrane Separation Technology of Japan



Applications

Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Secondary and Tertiary wastewater

■ Product Datasheet

HFU-2020AN


Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	216 (8.5)
Length		mm (ft)	2,160 (7.087)
Weight	Full of Water	kg (lbs)	92 (203)
	After Draining	kg (lbs)	59 (131)

Connections	Value
(A) Filtrate Outlet	80A
(B) Air Outlet	65A
(C) Feed Water / Air Inlet	80A

Material Specifications	
Description	Material
Casing	uPVC
Cap	uPVC
Potting	Epoxy resin
O-ring	EPDM

Please contact Toray for more detailed drawing and dimensions.

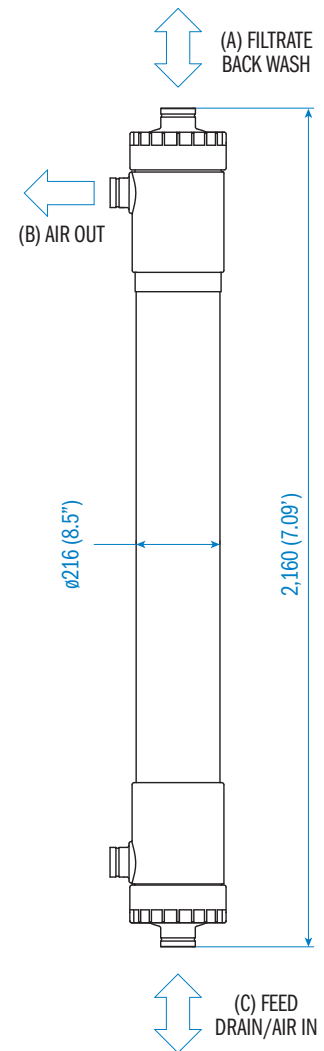

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

©2022 Toray Industries, Inc.



LinkedIn



YouTube

For more info, please visit
water.toray

HFU-2020HN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Toray's hollow fiber PVDF UF membrane module effectively removes suspended solids and microorganisms such as pathogens when used for various types of water treatment. The HFU-2020HN module is a high-pressure resistant UF membrane module ideal for direct coupling to a RO system.

Membrane Characteristics		Unit	Value
Membrane Material			PVDF (Polyvinylidene fluoride)
Nominal Pore Size		μm	0.01
Outer Membrane Surface Area		m ² (ft ²)	72 (775)
Operating Parameters		Unit	Value
Maximum Feed water / Filtrate Flow		m ³ /h (gpm)	12 (53)
Maximum Backwash Flow		m ³ /h (gpm)	13.5 (59)
Maximum Air Flow		Nm ³ /h (scfm)	9.0 (5.3)
Maximum Inlet Pressure		kPa (psi)	600 (87.0)
Maximum Backwash Pressure		kPa (psi)	300 (43.5)
Normal Operating Transmembrane Pressure		kPa (psi)	0–200 (0–29)
Operating Temperature Range		°C (°F)	0–40 (32–104)
pH Range	During Filtration		1–10
	During Cleaning		0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.



Applications

Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Secondary and Tertiary wastewater

■ Product Datasheet

HFU-2020HN


Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	216 (8.5)
Length		mm (ft)	2,160 (7.087)
Weight	Full of Water	kg (lbs)	110 (243)
	After Draining	kg (lbs)	67 (148)

Connections	Value
(A) Filtrate Outlet	80A
(B) Air Outlet	65A
(C) Feed Water / Air Inlet	80A

Material Specifications	
Description	Material
Casing	uPVC
Cap	uPVC
Potting	Epoxy resin
O-ring	EPDM

Please contact Toray for more detailed drawing and dimensions.

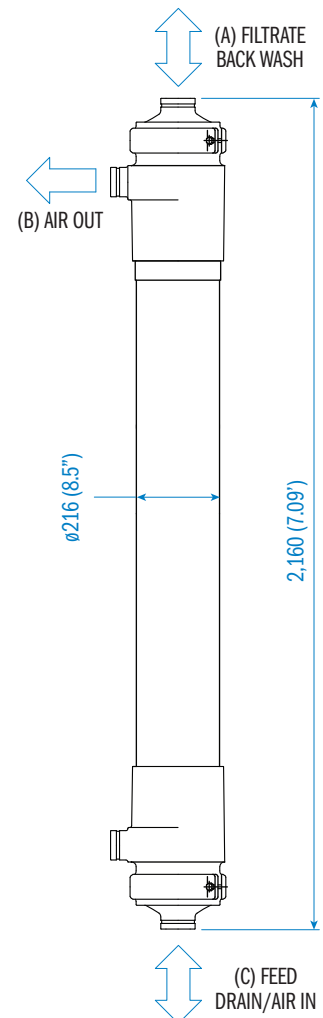

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

©2022 Toray Industries, Inc.



LinkedIn



YouTube

For more info, please visit
water.toray

HFU-1020AN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Toray's hollow fiber PVDF UF membrane module effectively removes suspended solids and microorganisms such as pathogens when used for various types of water treatment. The flux rates of HFU-1020AN modules are ideal for smaller commercial systems.



Membrane Characteristics		Unit	Value
Membrane Material			PVDF (Polyvinylidene fluoride)
Nominal Pore Size		μm	0.01
Outer Membrane Surface Area		m ² (ft ²)	29 (312)
Operating Parameters		Unit	Value
Maximum Feed water / Filtrate Flow		m ³ /h (gpm)	4.8 (21)
Maximum Backwash Flow		m ³ /h (gpm)	5.4 (23)
Maximum Air Flow		Nm ³ /h (scfm)	9.0 (5.3)
Maximum Inlet Pressure		kPa (psi)	300 (43.5)
Maximum Backwash Pressure		kPa (psi)	300 (43.5)
Normal Operating Transmembrane Pressure		kPa (psi)	0–200 (0–29)
Operating Temperature Range		°C (°F)	0–40 (32–104)
pH Range	During Filtration		1–10
	During Cleaning		0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.

Product Certifications & Compliances

- NSF/ANSI 61 for drinking water applications
- NSF/ANSI 419 to comply with the U.S. EPA's Long Term 2 Enhanced Surface Water Treatment Rule (LT2ESWTR), which allows membrane manufacturers to prove Cryptosporidium reduction.
- Association of Membrane Separation Technology of Japan



Applications


Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Tertiary wastewater

■ Product Datasheet

HFU-1020AN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	216 (8.5)
Length		mm (ft)	1,120 (3.675)
Weight	Full of Water	kg (lbs)	51 (112)
	After Draining	kg (lbs)	32 (71)
Connections		Value	
(A) Filtrate Outlet		80A	
(B) Air Outlet		65A	
(C) Feed Water / Air Inlet		80A	
Material Specifications			
Description		Material	
Casing		uPVC	
Cap		uPVC	
Potting		Epoxy resin	
O-ring		EPDM	

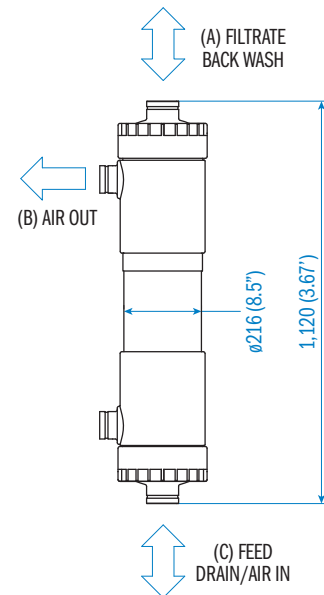

Please contact Toray for more detailed drawing and dimensions.

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

©2022 Toray Industries, Inc.

LinkedIn YouTube

For more info, please visit
water.toray

HFU-1010N

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Toray's PVDF membrane construction is highly resistant to chlorine and strong acids, which allows for better cleaning and optimization of filtration flux rates after cleaning. The hollow fiber modules effectively remove suspended solids, viruses, and bacteria and are certified for drinking water applications. The HFU-1010N model is ideal for small capacity equipment.

Membrane Characteristics	Units	Value
Membrane Material		PVDF (Polyvinylidene fluoride)
Nominal Pore Size	μm	0.01
Outer Membrane Surface Area	m ² (ft ²)	7 (75)
Operating Parameters	Units	Value
Maximum Feed water / Filtrate Flow	m ³ /h (gpm)	1.2 (5.1)
Maximum Backwash Flow	m ³ /h (gpm)	1.3 (5.7)
Maximum Air Flow	Nm ³ /h (scfm)	2.2 (1.3)
Maximum Inlet Pressure	kPa (psi)	300 (43.5)
Maximum Backwash Pressure	kPa (psi)	300 (43.5)
Normal Operating Transmembrane Pressure	kPa (psi)	0–200 (0–29)
Operating Temperature Range	°C (°F)	0–40 (32–104)
pH Range	During Filtration	1–10
	During Cleaning	0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.

Product Certifications & Compliances

- Association of Membrane Separation Technology of Japan

Applications


Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Tertiary wastewater

■ Product Datasheet

HFU-1010N

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	114 (4.49)
Length		mm (ft)	1,078 (3.537)
Weight	Full of Water	kg (lbs)	15 (33)
	After Draining	kg (lbs)	9 (20)
Connections		Value	
(A) Filtrate Outlet		IDF/ISO Clamp Union Fitting 1.5S	
(B) Air Outlet		IDF/ISO Clamp Union Fitting 1.5S	
(C) Feed Water / Air Inlet		IDF/ISO Clamp Union Fitting 1.5S	
Material Specifications			
Description		Material	
Casing		uPVC	
Cap		uPVC	
Potting		Epoxy	
O-ring		NBR	

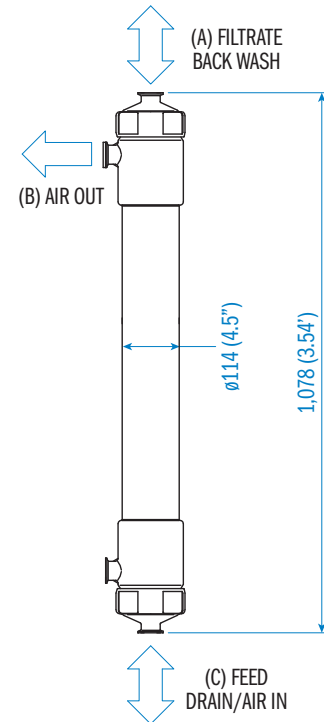

Please contact Toray for more detailed drawing and dimensions.

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

©2022 Toray Industries, Inc.

LinkedIn YouTube

For more info, please visit
water.toray

HFU-B2315AN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

The HFU-B2315AN module features Toray's proven durable PVDF hollow fiber membrane with a high packing density per module resulting in a compact system design and lower capital footprint.

Membrane Characteristics		Units	Value
Membrane Material			PVDF (Polyvinylidene fluoride)
Nominal Pore Size		μm	0.01
Outer Membrane Surface Area		m ² (ft ²)	60 (646)
Operating Parameters		Units	Value
Maximum Feed water / Filtrate Flow		m ³ /h (gpm)	10.0 (44)
Maximum Backwash Flow		m ³ /h (gpm)	11.2 (49)
Maximum Air Flow		Nm ³ /h (scfm)	6.7 (3.9)
Maximum Inlet Pressure		kPa (psi)	300 (43.5)
Maximum Backwash Pressure		kPa (psi)	300 (43.5)
Normal Operating Transmembrane Pressure		kPa (psi)	0–200 (0–29)
Operating Temperature Range		°C (°F)	0–40 (32–104)
pH Range	During Filtration		1–10
	During Cleaning		0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.



Product Certifications & Compliances

- NSF/ANSI 61 for drinking water applications
- NSF/ANSI 419 to comply with the U.S. EPA's Long Term 2 Enhanced Surface Water Treatment Rule (LT2ESWTR), which allows membrane manufacturers to prove Cryptosporidium reduction.



Applications

Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Tertiary wastewater

■ Product Datasheet

HFU-B2315AN


Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	178 (7.01)
Length		mm (ft)	2,332 (7.651)
Weight	Full of Water	kg (lbs)	65 (143)
	After Draining	kg (lbs)	35 (77)

Connections	Value
(A) Filtrate Outlet	50A
(B) Air Outlet	Φ57.91 mm x P3
(C) Feed Water / Air Inlet	50A

Material Specifications	
Description	Material
Casing	uPVC
Cap & Sockets	uPVC
Potting (Adhesive)	Epoxy
O-ring	EPDM

Please contact Toray for more detailed drawing and dimensions.

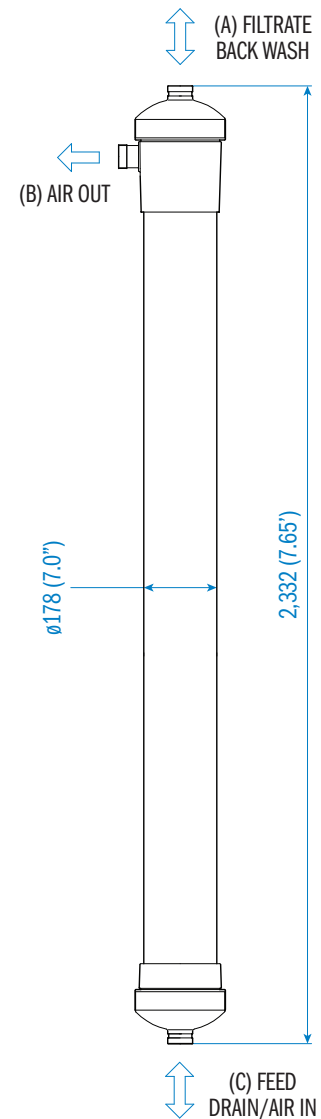

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

©2022 Toray Industries, Inc.

LinkedIn YouTube

For more info, please visit
water.toray

HFUG-B2315AN

High Area Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

The HFUG-B2315AN module features Toray's proven durable PVDF hollow fiber membrane with a high packing density per module resulting in a compact system design and lower capital footprint.

Membrane Characteristics		Units	Value
Membrane Material			PVDF (Polyvinylidene fluoride)
Nominal Pore Size		μm	0.01
Outer Membrane Surface Area		m ² (ft ²)	75 (807)
Operating Parameters		Units	Value
Maximum Feed water / Filtrate Flow		m ³ /h (gpm)	12.5 (55)
Maximum Backwash Flow		m ³ /h (gpm)	14 (61)
Maximum Air Flow		Nm ³ /h (scfm)	6.7 (3.9)
Maximum Inlet Pressure		kPa (psi)	300 (43.5)
Maximum Backwash Pressure		kPa (psi)	300 (43.5)
Normal Operating Transmembrane Pressure		kPa (psi)	0–200 (0–29)
Operating Temperature Range		°C (°F)	0–40 (32–104)
pH Range	During Filtration		1–10
	During Cleaning		0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.



Product Certifications & Compliances

- NSF/ANSI 61 for drinking water applications
- NSF/ANSI 419 to comply with the U.S. EPA's Long Term 2 Enhanced Surface Water Treatment Rule (LT2ESWTR), which allows membrane manufacturers to prove Cryptosporidium reduction.



Applications

Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Tertiary wastewater

■ Product Datasheet

HFUG-B2315AN


High Area Pressurized Outside to In / Dead-end Filtration
Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	178 (7.01)
Length		mm (ft)	2,332 (7.651)
Weight	Full of Water	kg (lbs)	65 (143)
	After Draining	kg (lbs)	35 (77)

Connections	Value
(A) Filtrate Outlet	50A
(B) Air Outlet	Φ57.91 mm x P3
(C) Feed Water / Air Inlet	50A

Material Specifications	
Description	Material
Casing	uPVC
Cap & Sockets	uPVC
Potting (Adhesive)	Epoxy
O-ring	EPDM

Please contact Toray for more detailed drawing and dimensions.

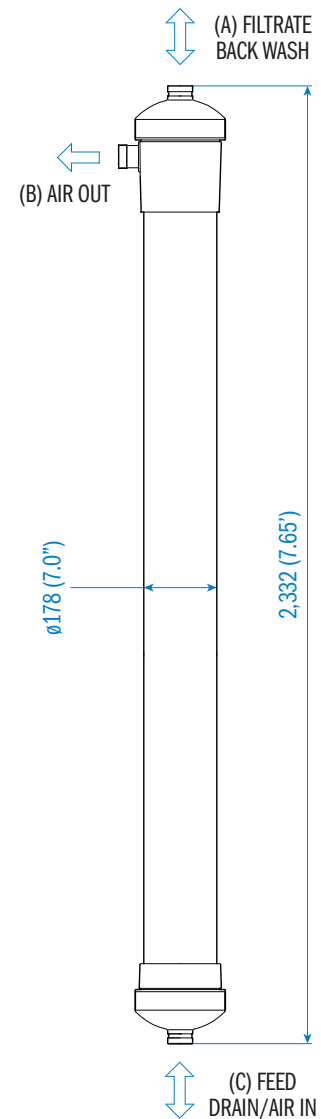

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

LinkedIn YouTube

For more info, please visit
water.toray

HSU-1515

Submerged Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

The submerged filtration method is ideal for treating feed water with high turbidity because of effective drainage and sludge removal. No pressure casing, less piping, and fewer valves can reduce capital costs and minimizes footprint requirements.

Membrane Characteristics		Units	Value
Membrane Material			PVDF (Polyvinylidene fluoride)
Nominal Pore Size		μm	0.01
Outer Membrane Surface Area		m ² (ft ²)	20 (215)
Operating Parameters		Units	Value
Maximum Feed water / Filtrate Flow		m ³ /h (gpm)	2.0 (8.8)
Maximum Backwash Flow		m ³ /h (gpm)	3.0 (13.2)
Maximum Air Flow		Nm ³ /h (scfm)	4.5 (2.6)
Maximum Backwash Pressure		kPa (psi)	200 (29.0)
Normal Operating Transmembrane Pressure		kPa (psi)	0–100 (0–14.5)
Operating Temperature Range		°C (°F)	0–40 (32–104)
pH Range	During Filtration		1–10
	During Cleaning		0–12

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.




Applications

Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Tertiary wastewater

HSU-1515

Submerged Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions & Weight		Unit	Value
Diameter		mm (in)	147 (5.79)
Length		mm (ft)	1,327 (4.35)
Weight	Wet Condition	kg (lbs)	18 (40)
Connections		Value	
Filtrate Outlet		IDF/ISO Clamp Union Fittings 1.5s	
Material Specifications			
Description		Material	
Cap / Protective Cylinder		ABS / PE	
Potting		Epoxy	
O-ring		EPDM	

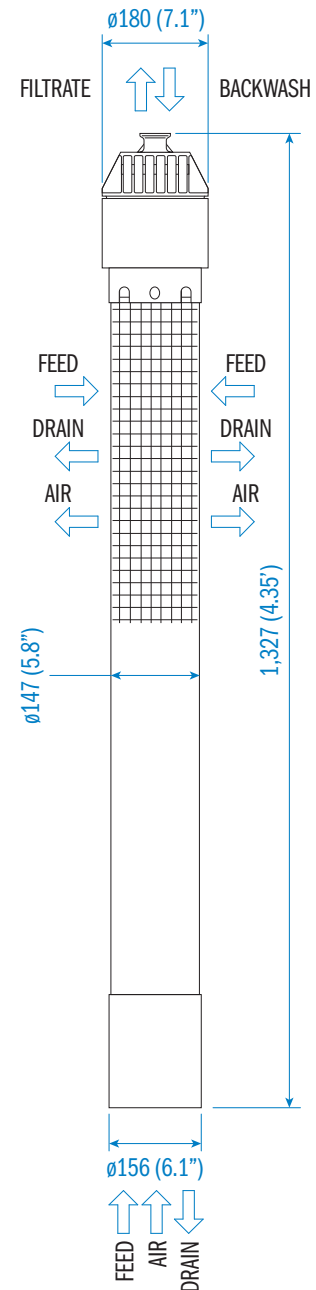

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters

Japan +81 3 3245 4542

Asia Pacific

China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)

USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710

Middle East (TMME)

Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

©2022 Toray Industries, Inc.



LinkedIn



YouTube

For more info, please visit
water.toray